



Plug and Socket Couplers Installation Instructions

Installation couplers are to be:


- Fully engaged and the retaining arms latched

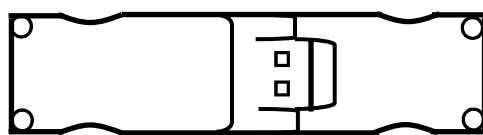

Correct

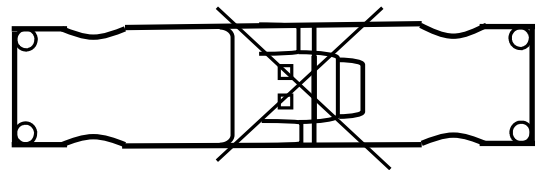

Incorrect

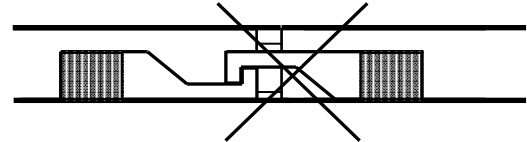

- Not under excessive strain, in case of doubt fix cable and connectors
- Not dangerously compatible with other installation coupler systems used in the same installation. Interchange ability with other installation coupler systems is not ensured
- Installed, connected and tested in accordance with AS/NZ 3000 (wiring rules and regulations)
- Distribute the load between outlets as evenly as possible
- Ensure that the sum of the loads on all outlets does not overload the input coupler and cable

DO NOT INSERT TEST PROBES LARGER THAN 0.8MM WIDE AS YOU WILL DAMAGE CONTACT

Test plugs are supplied with starter sockets. Additional test plugs are available free of charge, should you require some please contact our sales team.

Australia: 1300 159 159

New Zealand: 09 582 0776