

THD-100

Docking Station

The Dual Stream 100W USB-C is the first of its kind in the market with the remote firmware update capability while. Featuring the latest DL-6950 chipset, CMS Dual Stream Dock is capable of supporting up to 2x4K displays with the option of DisplayPort inputs and/or HDMI port inputs.

The Dual Stream Dock delivers 100W charging via a PD 3.0 enabled USB Type-C 3.1 Gen2 Port While supporting multiple displays and high speed data transfer, ethernet and multiple USB3.1 Gen 2 Type-A/C ports for desktop peripherals.

THD-100	USB-C Dual Stream Dock—100W
THD-SWE1**	Integrated Softwired Enclosure With 5x Auto Switched GPO To Suit THD Series Docking Stations And Power Supply

Workstation Setup

1. Connect all peripheral devices to the docking station.




2. Connect the CMS Universal Docking Station to your host device.



NOTE:

** Docking Station available only in Black

PRODUCT DATA SHEET

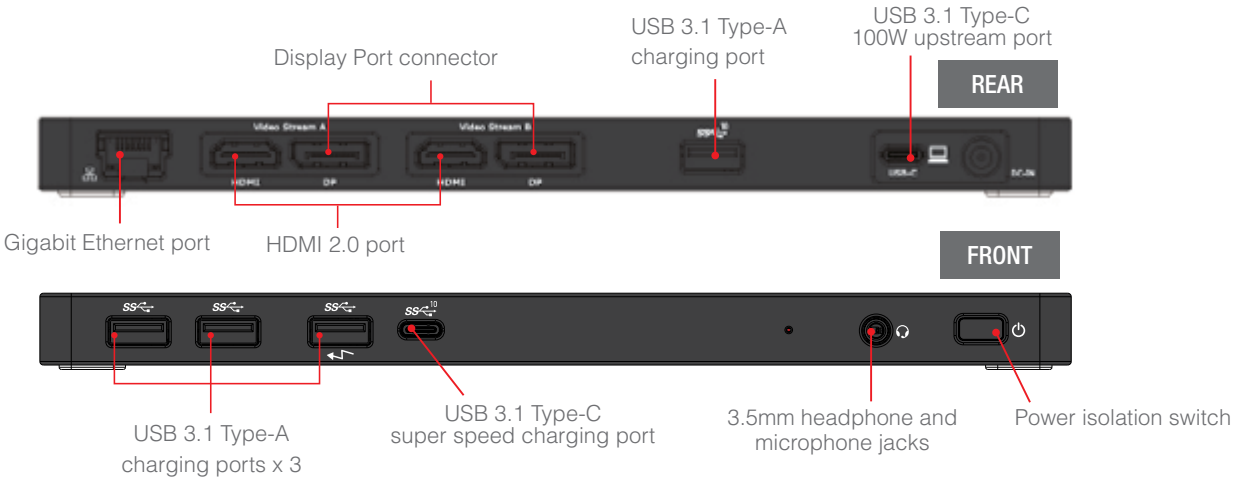

Interfaces	DC Power IN	Power Jack x1
	Upstream	USB-C/F x 1 (USB 3.1 Gen 2)
	Downstream	USB-A/F × 2 (USB 2.0)
		USB-A/F × 1 (USB 3.1 Gen 2)
		USB-A/F × 1 (USB 3.1 Gen 2) support BC 5V/2.4A fast charge
		USB-C/F x 1 (USB 3.1 Gen 2) Data only 5V/1.5A
		HDMI × 2
		DisplayPort × 2
		Gigabit Ethernet × 1
		Combo Audio Jack x 1
Interface Transfer Rates		USB 3.1 Gen 2: 10 Gbps*
Max Resolutions		4096 x 2160 / 60Hz(when supported by host and display) x2, 5K x 1 monitor
Power - (PD 3.0)		100W
USB-C Support		Upstream: Data transfer
		Power Delivery
OS Support		Windows 10 and later, Mac OS X 10.10.2 and later, Andriod, Ubuntu
Power Supply		150w power adaptor
Dimensions (W x L x H)		230 x 70 x 17 mm
Hardware Requirements		- Thunderbolt 3 or USB-C port - Power Delivery charging support requires host computer - Support Power Delivery 2.0 charging (up to 100W max)
System Requirements (Any of the following)		- Microsoft Windows® 7, Windows® 8, Windows® 8.1, or - Windows® 10 (32/64-bit) - Mac OS® X v10.8 or later - Android 5.0 or later - Chromebooks - Ubuntu 14.04.x LTS and 16.04 LTS on x86 platform

Disclaimer: CMS Electracom has made every attempt to ensure the accuracy and reliability of the information provided in this document are correct. All information contained in this document is to be used for general guidance only. CMS Electracom reserves the right to change, delete or modify the information without notice. V1 2026.
For product warranty and returns see cmselectra.com/au/resources/warranty/
© CMS Electracom 2026

CMS Electracom