

### Installing the unit to the furniture

- i. Locate and align the lids into the cut out from the underside of the furniture. Ensure the orientation is as required.

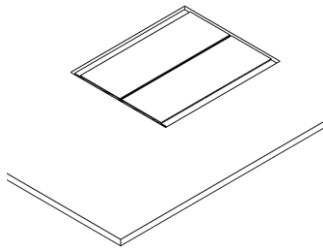


Figure 1

- ii. Mount the unit to the furniture using supplied screws.

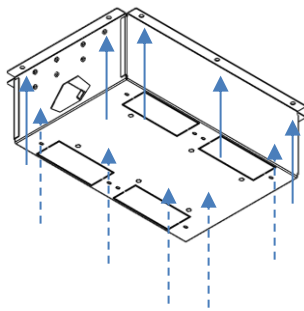


Figure 2

### Adjusting the lid height/ Levelling

- i. Slightly loosen the four screws on left and right lid brackets.

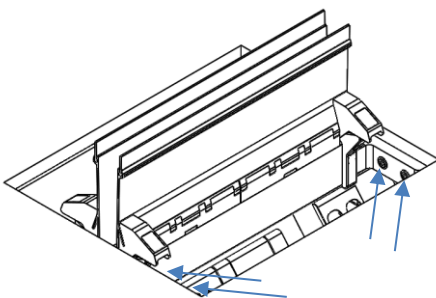


Figure 3

- ii. Move the bracket up or down to adjust the lid height as required and tighten the screws.

### Removing the lid (for lamination etc)

- i. Depress the tabs on the hinges while gently pulling the lid upwards. The lid assembly will detach from the unit.

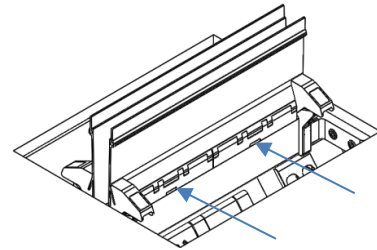


Figure 4

- ii. Repeat the same procedure for removing the other lid on dual lid models.

### Levelling the lid using Alignment Jig

(if required)

- i. Remove the lids as per instructions above.
- ii. Insert the levelling jigs into the slots on the rail.
- iii. Adjust the height as per Adjusting the 'lid height/ levelling' section to align the top surface of the jig with the desktop.
- iv. Remove the alignment jigs and attach the lid

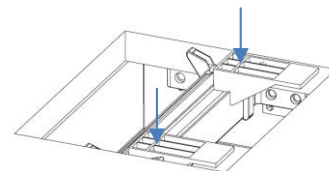


Figure 5

### Attaching the lid

- i. Align the lid between the magnet blocks and push into the slots on the rail. The lid will click in place.

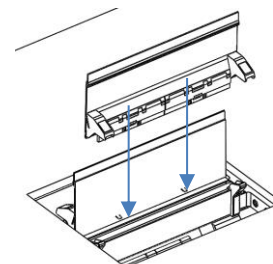


Figure 6