
GESRM2

Decorative IP Floor Outlet

A simple solution just got clever. When closed, the GESRM2 floor outlet box is dust and water resistant to IP65. The unit can be fitted with one general purpose power outlet, two RJ45 data / telephone outlets, or one auto switched power outlet and two RJ45 data / telephone outlets. The GESRM2 is also available as a directional spotlight.

The IP65 rated lid section is manufactured from die cast zinc non-slip surfacing. The undercarriage is manufactured from 1.2mm galvanized steel.

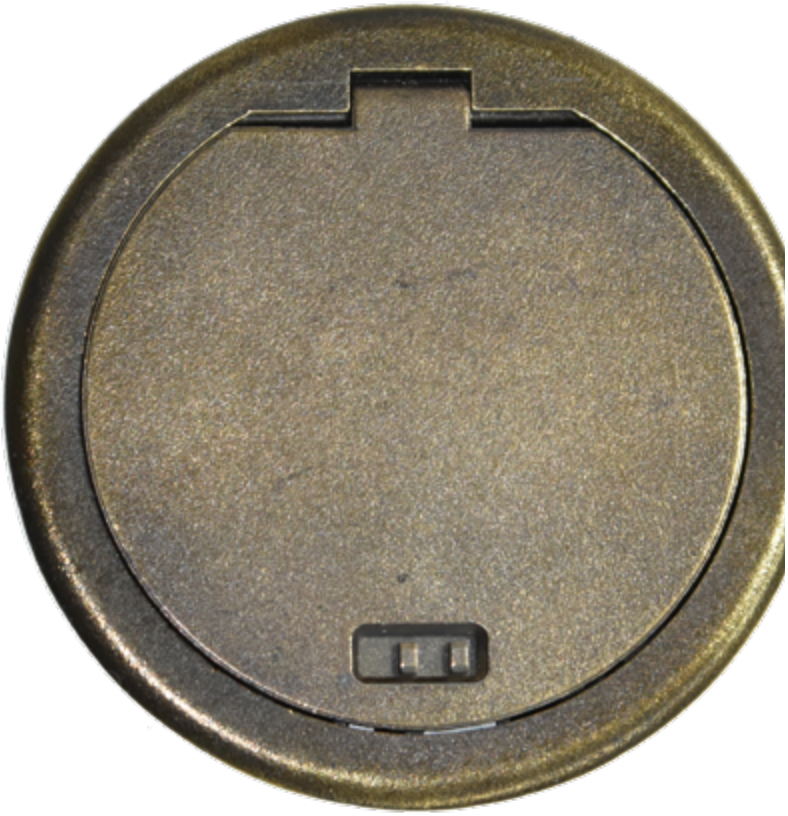

Butted-Edge Lid - Brass

GESRM2B-CT-NI	Ackermann Floor Box Carpet Trim & Nickel Finish. Non Slip Surface IP65 Rated Complete With An Auto Switched GPO & Provision For 2x Data
GESRM2B-CT-BR/CU	Ackermann Floor Box Carpet Trim & Nickel Finish. Non Slip Surface IP65 Rated Complete With An Auto Switched GPO & Provision For 2x Data - Brass
GESRM2A-BE-NI	Ackermann Floor Box Butted Edge & Nickel Finish. Non Slip Surface IP65 Rated Complete With 1x 10amp Switched GPO
GESRM2A-BE-BR/CU	Ackermann Floor Box Butted Edge & Nickel Finish. Non Slip Surface IP65 Rated Complete With 1x 10amp Switched GPO - Brass
GESRM2B-BE-NI	Ackermann Floor Box Butted Edge & Nickel Finish. Non Slip Surface IP65 Rated Complete With An Auto Switched GPO & Provision For 2x Data
GESRM2B-BE-BR/CU	Ackermann Floor Box Butted Edge & Nickel Finish. Non Slip Surface IP65 Rated Complete With An Auto Switched GPO & Provision For 2x Data - Brass

Technical Specification

PROTECTION	IP65 when closed
CUT OUT SIZE	115mm Diameter, 100mm Depth
COMPLIANCE	CAT6 & CAT6A compliant

Disclaimer: CMS Electracom has made every attempt to ensure the accuracy and reliability of the information provided in this document are correct. All information contained in this document is to be used for general guidance only. CMS Electracom reserves the right to change, delete or modify the information without notice. V1 2026.
For product warranty and returns see cmselectra.com/au/resources/warranty/
© CMS Electracom 2026

CMS Electracom