


ATOM MINI

LUX Range - In-Desk USB Charging



ATOM MINI - FLANGE OPTION

AMCF118***	LUX - Atom Mini – 2-Part Module, 118W USB Module, 1500mm USB C to 12 Pin (Black) – Flange Metal Fascia
AMCF140***	LUX - Atom Mini – 2-Part Module, 140W USB Module, 1500mm USB C to 12 Pin (Black) – Flange Metal Fascia



ATOM MINI - BUTTED EDGE OPTION

AMCB118***	LUX - Atom Mini – 2-Part Module, 118W USB Module, 1500mm USB C to 12 Pin (Black) – Butted Edge Metal Fascia
AMCB140***	LUX - Atom Mini – 2-Part Module, 140W USB Module, 1500mm USB C to 12 Pin (Black) – Butted Edge Metal Fascia

Notes:

- Available in either Flange or Butted Edge Options.
- Softwiring leads for connecting to USB Module are sold separately
- ** Represents Metal Colour Choice in Matte or Brushed
- Colours shown are indicative only and may not be an exact representation of the final product colour.

Colours:

Brushed Options:

- BSB: Brass (Brushed)
- BZB: Bronze (Brushed)
- SSB: Stainless Steel (Brushed)

Matte Options:

- BSM: Brass (Matte)
- BZM: Bronze (Matte)
- SSM: Stainless Steel (Matte)
- BKM: Graphite (Matte)



Brass
(Brushed)



Bronze
(Brushed)



Stainless Steel
(Brushed)




Brass
(Matte)



Bronze
(Matte)




Stainless Steel
(Matte)



Graphite
(Matte)

Atom Mini Daisy Chain Installation Example

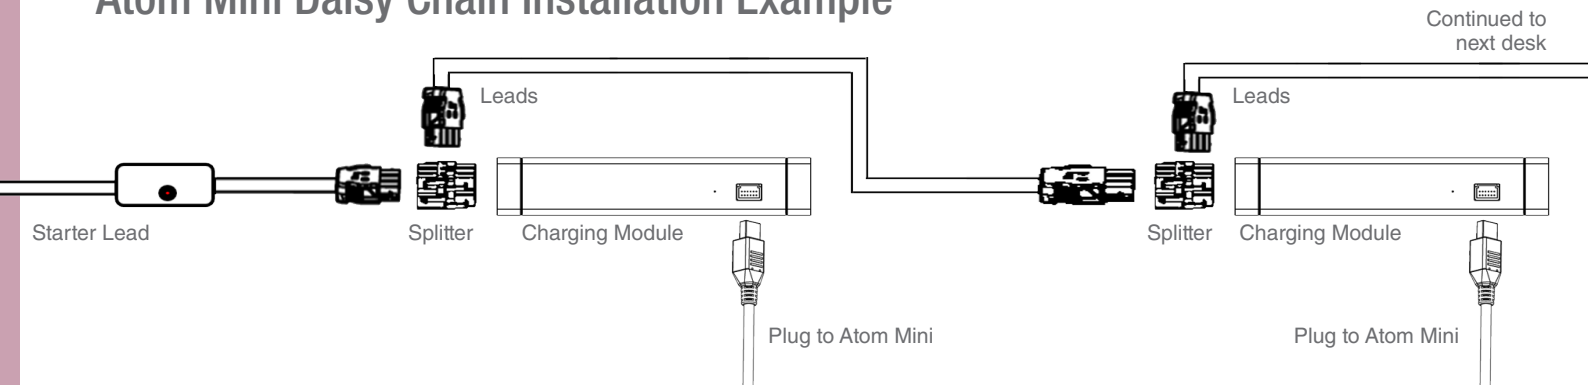

Product Specifications - 118W/140W Charging Module

Technical Data

Part Number		SW18UAC118	SW18UAC140
Product		USB-C 118W	USB-C 140W
Input		100-240V AC; 50-60Hz; 2.5A	100-240V AC; 50-60Hz; 2.5A
Maximum total output		118W	140W
USB outlets		1 x Type-C, 1 x Type-A 1 x Type C (On Charger body)	1 x Type-C, 1 x Type-A
Standby power		<0.3 W	<0.3 W
Over voltage protection		Yes	Yes
Short circuit protection		*USB Auto Shut Down & Recovery	*USB Auto Shut Down & Recovery
Over power protection		130W	150W
Operating temperature range		0-35°C	0-35°C
Over voltage category		OVC III	OVC III
Compliance		AS/NZS 61558.2.16 OVCIII; CISPR32:2015	AS/NZS 61558.2.16 OVCIII; CISPR32:2015
Load combinations	Port 1	USB A 5V/3A; 9V/2A; 12V/1.5A	USB A 5V/3A; 9V/2A; 12V/1.5A
	Port 2	USB C 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A (Connected Devices Only on One Other Port) 5V/3A,9V/3A,12V/3A,15V/3A,20V/4A (Connected Devices on All 3 Ports)	USB C 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A, 28V/5A (No Connected Devices on USB A) 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A (Connected Devices on USB A)
	Port 3	USB C 5V/3A,9V/3A,12V/1.5A,15V/1.2A,20V/0.9A	
Reset button		Yes	Yes
Protocols supported - USB-A		QC3.0/QC2.0 /FCP/AFC/BC1.2 /Apple2.1/ Apple2.4	QC3.0/QC2.0 /FCP/AFC/BC1.2
Protocols supported - USB-C		PPS PD3.0/QC3.0/QC2.0 /FCP/AFC	PPS PD3.1/PD3.0/QC3.0/QC2.0 /FCP/AFC/SCP
LED indicator		No LED	No LED