

VERO

LUX Range - In-Desk USB Charging

The LUX Range combines form over function - providing a statement piece while delivering powerful USB Charging and Power where its needed.

Available in a range of premium metal finishes, the range includes a variety of in and on-desk options to power every space.



Brass
(Brushed)



Bronze
(Brushed)



Stainless Steel
(Brushed)




Brass
(Matte)



Bronze
(Matte)



Stainless Steel
(Matte)



Graphite
(Matte)

VERO - In-Desk USB Charging




VERO - 4-GANG

VEAUCC65***

LUX - Vero - Type A - 2x Dual USB C/C Keystone Charging Ports (65W)
(Includes Under-Desk Mounting Box with 2x 65W USB Modules + 2x Keystone Leads to USB-C Connector)

VEAUCC140***

LUX - Vero - Type A - 2x Dual USB C/C Keystone Charging Ports (140W)
(Includes Under-Desk Mounting Box with up to 140W USB Modules + 2x Keystone Leads to 12-Pin Connector)

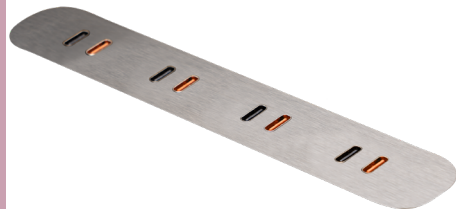

VERO - 8-GANG

VEBUCC65***

LUX - Vero - Type B - 4x Dual USB C/C Keystone Charging Ports (65W)
(Includes Under-Desk Mount Box with 4x 65W Inline USB Modules + 4x Keystone Leads to USB-C Connector)

VEBUCC140***

LUX - Vero - Type B - 4x Dual USB C/C Keystone Charging Ports (140W)
(Includes 2x Under-Desk Mounting Boxes with up to 140W USB Modules + 4x Keystone Leads to 12-Pin Connector)

Notes:

- Starter Lead and/or Interconnecting Leads Sold Separately
- ** Represents Metal Colour Choice in Matte or Brushed
- Customisable options are available on request
- Colours shown are indicative only and may not be an exact representation of the final product colour.
- **140W Option:** Each orange USB-C port will provide up to 140W charging & each black USB-C port provides up to 18W charging.
- **65W Option:** Each orange USB-C port will provide up to 65W charging & each black USB-C port provides up to 18W charging.

Colours:

Brushed Options:

- BSB: Brass (Brushed)
- BZB: Bronze (Brushed)
- SSB: Stainless Steel (Brushed)

Matte Options:

- BSM: Brass (Matte)
- BZM: Bronze (Matte)
- SSM: Stainless Steel (Matte)
- BKM: Graphite (Matte)

Product Specifications - USB Modules

Technical Data			
Part Number		SW18UCC65	SW18UAC140
Product		USB-C/C 65W	USB-C 140W
Input		100-240V AC, 50-60Hz, 2A	100-240V AC; 50-60Hz; 2.5A
Maximum total output		65W	140W
USB outlets		2 x Type-C	1 x Type-C, 1 x Type-A
Standby power		<0.3 W	<0.3 W
In-rush current		50A (Max)	Yes
Over voltage protection		5V: 6.8V 9V: 11.7 12V: 15.6 15V: 19.5 20V: 24V	
Short circuit protection		*USB Auto Shut Down & Recovery	*USB Auto Shut Down & Recovery
Over power protection		75W	150W
Over voltage category		0-40°C	0-35°C
Operating temperature range		OVC III	OVC III
Compliance		AS/NZS 61558.2.16	AS/NZS 61558.2.16 OVCIII; CISPR32:2015
Load combinations	Port 1	USB C 5V/3A,9V/2A,12V/1.5A,15V/1.2A,20V/0.9A	USB A 5V/3A; 9V/2A; 12V/1.5A
	Port 2	USB C 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A (No Connected Devices on USB C[1]) 5V/3A,9V/3A,12V/3A,15V/3A,20V/2.25A (Connected Devices on USB C[1])	USB C 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A, 28V/5A (No Connected Devices on USB A) 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A (Connected Devices on USB A)
	Port 3		
Reset button		Yes	Yes
Protocols supported - USB-A			QC3.0/QC2.0 /FCP/AFC/BC1.2
Protocols supported - USB-C		PPS PD3.0/PD3.0/QC3.0/QC2.0 /FCP/AFC/ BC1.2 /Apple2.1/Apple2.4	PPS PD3.1/PD3.0/QC3.0/QC2.0 /FCP/AFC/ SCP
LED indicator		Normal 5V : Green Charging , Quick Charging: Blue	No LED