

# Century Series

## Provision For 6 Standard Outlet Plates

Our Century Series Floor Box is designed with the ability to be installed into either Concrete or Access Floor. Each angled mounting plate offers easy cable pass-through. It can be easily fitted with a wide variety of Power, Data and AV Switch Plates including our C-Series range.



Century 6-Compartment Shown With  
Dual GPO Wall Plates - C16H.2WT



6-Comp Polycarbonate Recessed Lid

### Key Features



- » Easy-grab handle and functional cable exit when lid closed
- » Provision for 6 standard outlet plates to suit a wide variety of Power, Data and AV requirements
- » Angled mounting plates with cable passthrough underneath
- » Suit both screed and raised floor applications
- » 25 & 32mm knock-outs to suit large data access requirements
- » CAT6 & CAT6A compliant

## Product Details




<b>CT06GY</b>	Century Floorbox 6 x Provision for standard outlet plates with Plastic Recess Lid - 100mm deep
<b>C16H.1WT</b>	Single 10amp GPO Switched - Hardwired
<b>C16H.2WT</b>	Double 10amp GPO Switched - Hardwired
<b>CSW1WT</b>	Data Provision Plate - Single
<b>CSW2WT</b>	Data Provision Plate - Dual
<b>CSW3WT</b>	Data Provision Plate - Triple
<b>CSW4WT</b>	Data Provision Plate - Quad
<b>CSW0WT</b>	Data Provision Plate - Blank

## Technical Specification


<b>Capacity</b>	6 x Provision For Standard Outlet Plates
<b>Floor Application</b>	Screed; Access Floor
<b>Box Cut-Out / Depth</b>	L360mm x W224mm x D100mm
<b>Lid Finish Options</b>	Polycarbonate With Galvanised Plate - Grey
<b>Lid Recess Dimension</b>	L282 x W205mm x D7mm
<b>Weight Rating</b>	120kg
<b>Undercarriage</b>	Powder-Coated Steel (Black)

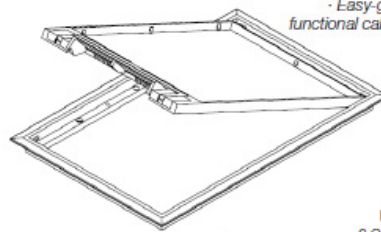


**LID FEATURES:**  
- Easy-grab handle and functional cable exit when lid closed.

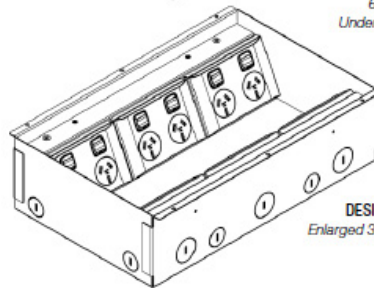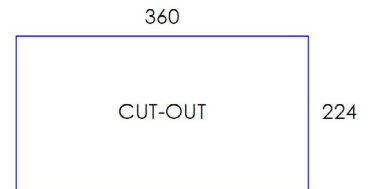


**UNDERCARRIAGE:**  
6 Compartment Steel Undercarriage c/w Angled Mounting Plates




**DESIGNED FOR DATA/AV:**  
Enlarged 32mm knock-outs for easier passthrough.



**CONDUIT LOCATION**  
Outlet Sides  
Enlarged 32mm knock-out for easy passthrough.

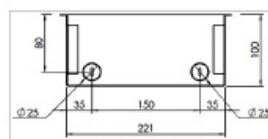

**CONDUIT LOCATION**  
Hinge & Exit Sides  
Standard 25mm knock-out

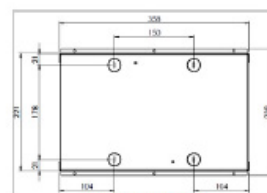

**CONDUIT LOCATION**  
Base Box  
Standard 25mm knock-outs