

ACCEDE

In-Table Modules, Undercarriage + Enclosure





ACSUE2UAC3202A20**_AV1 – Accede in desk module – Single lid. Undercarriage + enclosure. 2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m. 1 HDMI 1.4 - 2m.

ACCEDE

In-Table Modules, Undercarriage + Enclosure

The Accede in-table power and communications centres are an effective way of supplying power, USB charging, USB data, ethernet and AV connectivity within boardroom, conference or meeting tables.

They enable all services to be connected within the work surface with easy access through the stylish aluminium lid. With both single and dual lid options, the lid sits near flush when in use. Cables exit via the flap and scalloped end caps on the single lid and via central brush strips on the dual lid.

The undercarriage and enclosure design allows for OEM laptop AC/DC adapter/charger power supplies to be permanently accommodated, plus AV hardware such as hubs and routers. Integral pass through features enable cables to be directly fed through for conference phones and or room booking tablets. Provision is also made for excess cables to be managed within the undercarriage and also the enclosure.

Features & Benefits

- » Uncluttered work surfaces when connectivity is not required or when it is.
- » Single or dual lid formats.
- » 30w, 60w and 100w USB charging options.
- » Multiple and bespoke power, data and AV configurations available.
- » Integral cable dump and pass through features.
- » Simple rectangular cut-out to work surface required.
- » Four screw installation.
- » Bespoke lid finishes available.

Configuration Examples



Single lid – 295mm
ACSUE2.....WT



Dual lid – 295mm
ACDUE2.....SL



Single lid – 435mm
ACSUE4.....WT



Dual lid – 435mm
ACDUE4.....BK

Finishes Available

 White (WT**)

 Silver (SL**)

 Black (BK**)

Standard Configurations

SINGLE LID - 295MM	
ACSUE2UAC320**	2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A.
ACSUE2UAC320**_AV1	2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A. 1 HDMI 1.4 - 2m.
ACSUE2202A20**	2 Power - 3A. 2m Starter lead – BS13A. 2 Data CAT6 UTP - 2m.
ACSUE2UAC3202A20**	2 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m.
ACSUE2UAC3202A20**_AV1	2 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m. 1 HDMI 1.4 - 2m.
DUAL LID - 295MM	
ACDUE2UAC320**	2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A.
ACDUE2UAC320**_AV1	2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A. 1 HDMI 1.4 - 2m.
ACDUE2202A20**	2 Power - 3A. 2m Starter lead – BS13A. 2 Data CAT6 UTP - 2m.
ACDUE2UAC3202A20**	2 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m.
ACDUE2UAC3202A20**_AV1	2 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m. 1 HDMI 1.4 - 2m.
SINGLE LID - 435MM	
ACSUE4UAC320**	4 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A.
ACSUE4UAC320**_AV1	4 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A. 1 HDMI 1.4 - 2m.
ACSUE4204A20**	4 Power - 3A. 2m Starter lead – BS13A. 2 Data CAT6 UTP - 2m.
ACSUE4UAC3204A20**	4 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m.
ACSUE4UAC3204A20**_AV1	4 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m. 1 HDMI 1.4 - 2m.

Standard Configurations


DUAL LID - 435MM	
ACDUE4UAC320**	2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A.
ACDUE4UAC320**_AV1	2 Power - 3A. Dual USB charger 30W – A + C PD fast charge. 2m Starter lead – BS13A. 1 HDMI 1.4 - 2m.
ACDU42204A20**	2 Power - 3A. 2m Starter lead – BS13A. 2 Data CAT6 UTP - 2m.
ACDUE4UAC3204A20**	2 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m.
ACDUE4UAC3204A20**_AV1	2 Power - 3A. Dual USB charger 30W - A + C PD fast charge. 2m Starter lead – BS13A . 2 CAT6 UTP Data – 2m. 1 HDMI 1.4 - 2m.

Notes:


- » All configurations are supplied with 2m leads. Alternative lengths are available upon request.
- » Data outlets/cables are CAT6 UTP. STP and other categories are available upon request.
- » Configurations employing audio, DisplayPort, pass throughs Thunderbolt, USB data, etc. are available upon request.
- » For 60w and 100w USB charging options, please contact uksales@cmselectra.com

Product Drawings - Examples

Accede Single Lid - 295mm
Reference Only


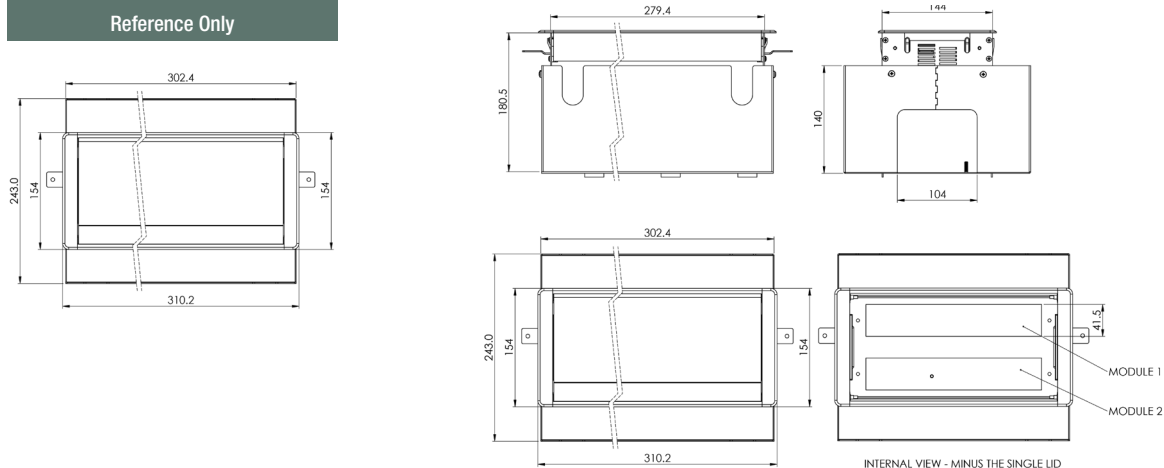


Accede Dual Lid - 295mm
Reference Only


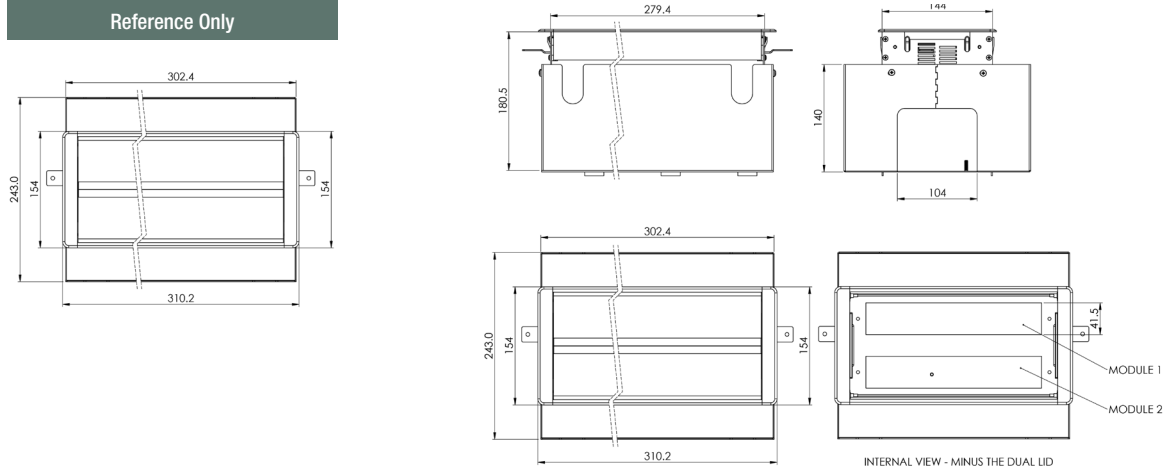


Product Drawings - Examples

Accede Single Lid - 435mm
Reference Only

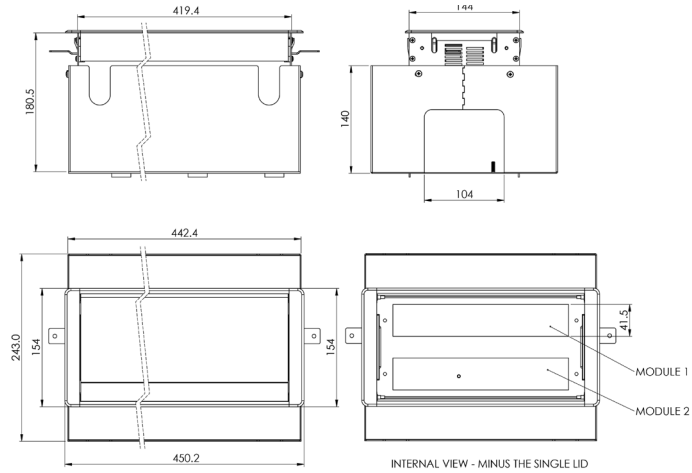


Accede Dual Lid - 435mm
Reference Only

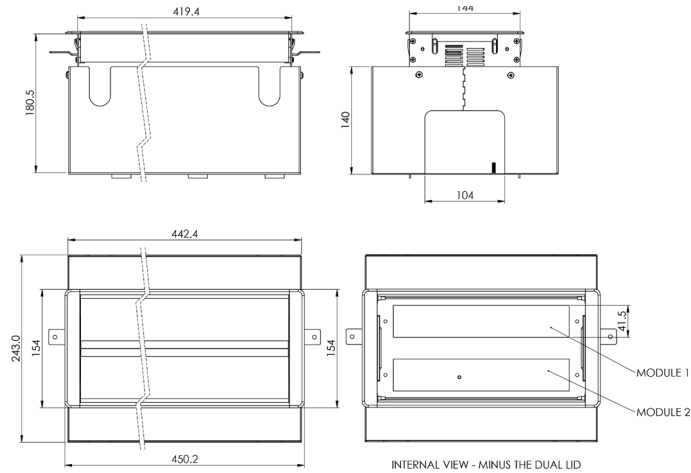


Cut Out - Examples

Accede Single + Dual - 295mm
Reference Only



Accede Single + Dual - 435mm
Reference Only



Product Specifications

USB 30 Watt A + C

Input	100-240V AC; 50/60Hz, 0.8A
Maximum power	30W
USB outlets	1 x Type-C PD3.0 fast charge 1 x Type-A standard fast charge
Operating temperature range	0-40C
Compliance	IEC 62368-1, EN 62368-1 CISPR32:2015, EN55032, EN55035, EN IEC 61000 3-2; 3-3
USB-C PD Specification	
Max standard output with no connected devices in port 1	20V/1.5A; 15V/2A; 9V/3A
Max output with Type-A port engaged	20V/0.75A; 15V/1A; 9V/1.5A
Protocols supported	Power Delivery (PD) 3.0, QC 3.0
USB-A Specification	
Max standard output with no connected devices in port 2	5V/2.1A
Max output with Type-C port engaged	5V/1A
Protocols supported	Fixed Voltage Fast Charge

USB 60 Watt A + A + C

Input	100-240V AC; 50/60Hz, 1.3A
Maximum power	60W
USB outlets	1 x Type-C PD3.0 fast charge 2 x Type-A standard fast charge
Operating temperature range	0-40C
Compliance	AS/NZS 60950.1 CISPR32:2015 EN60950_1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013; EN55032: 2015; EN61000-3-2: 2013; EN61000-3-3: 2014; EN55024: 2010+A1: 2015
USB-C PD Specification	
Max standard output with no other connected devices	20V/3A; 9V/2A; 12V/1.5A
Max output with both Type-A ports engaged	20V/1.5A
Protocols Supported	Power Delivery (PD) 3.0
USB-A (1) Specification	
Max standard output with no other connected devices	5V/3A; 9V/2A; 12V/1.5A
Max output with Type-C and Type-A (2) ports engaged	12V/1.5A
Protocols supported	QC 3.0
USB-A (2) Specification	
Max standard output with no other connected devices	5V/2.4A
Max output with Type-C and Type-A (1) ports engaged	5V/2.4A
Protocols supported	Fixed Voltage Fast Charge

Product Specifications

USB 100 Watt A + C

Input	100-240V AC; 50/60Hz, 1.5A
Maximum power	100W
USB outlets	1 x Type-C PD3.0 fast charge
	1 x Type-A standard fast charge
Operating temperature range	0-35C
Compliance	AS/NZS 62368.1 OCVIII, IEC 62368-1, EN 62368-1
	CISPR32:2015, EN55032, EN IEC 61000 3-2; 3-3
USB-C PD Specification	
Max standard output with no other connected devices	20V/5A; 15V/3A; 9V/3A; 5V/3A+5V/3A; 9V/2A; 12V/1.5A
Max output with Type-A port engaged	20V/3.6A; 15V/3A; 9V/3A; 5V/3A
Protocols supported	PD3.0, QC3.0
USB-A Specification	
Max standard output with no other connected devices	5V/3A; 9V/2A; 12V/1.5A
Max output with Type-C port engaged	12V/1.5A
Protocols supported	QC3.0