CMS Electracom

ELIO80

IN TABLE - POWER, USB A/C & DATA



www.cmselectra.com



UE801UAC201B20**

ELIO80

In Table - Power, Data & USB A/C

With a stylish minimal profile the ELIO80 sits near flush with the work surface and optimises the available space, with multiple connectivity within a 90mm diameter. Access is provided to a power outlet, 15W A/C PD USB Charging Port, additional data, USB A or C, AV and cable pull through configurations.

Colours Available

○ White ● Black

Refer to our Standard Configurations section to see multiple further options.

Features & Benefits

- Triple USB charging.
- Shallow above surface profile.
- Simple installation via threaded underside toggle clamps or screwed collar.
- Aperture required is a standard industry 80mm grommet.
- GST connectivity.
- Optional in-line RCD protection.
- Simple modular swap out multiple data, AV, plus pass through options.
- CEE7/3 and CEE7/5 outlet option


Standard Configurations

UE80X1UACC10PT1A20**	1 Power - 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 1 Data CAT6 UTP. 1m Starter lead - GST. 1 Pull through
UE80X1UACC10PT_AV5C**	1 Power - 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 1 Data USB C. 1m Starter lead - GST. 1 Pull through
UE80X1UACC10PT_AV5**	1 Power - 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 1 Data USB A. 1m Starter lead - GST. 1 Pull through
UE80X1UACC10PT_AV1**	1 Power 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 1 HDMI. 1m Starter lead - GST. 1 Pull through
UE80X1UACC10_AV5_AV5C**	1 Power 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 1 Data USB C. 1 USB A Data. 1m Starter lead - GST.
UE80X1UACC102A20**	1 Power 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 2 Data CAT6 UTP. 1m Starter lead - GST.
UE80X1UACC101A20_AV1**	1 Power 3.15A. Triple USB charger 5v DC 3.1A – A + C + C. 1 Data CAT6 UTP. 1 HDMI. 1m Starter lead - GST.


Product Specifications

Test Standard	BS5733:2010 + A1 IEC62368-1 2020 + A11
Rated Voltage	250v AC 50/60Hz
Rated Current	5A
Degree of Protection	IP20
Protection Class	Class 1
USB-C PD Specification	
Max standard output with no connected devices in port 1	5V/3.1A; 5V/2A
Max output with Type-A port engaged	5V/0.75A; 15V/1A; 9V/1.5A
Protocols Supported	Power Delivery (PD) 3.0, QC 3.0
USB-A Specification	
Max standard output with no connected devices in port 2	5V/2.1A
Max output with Type-C Port engaged	5V/1A
Protocols Supported	Fixed Voltage Fast Charge

Product Dimensions

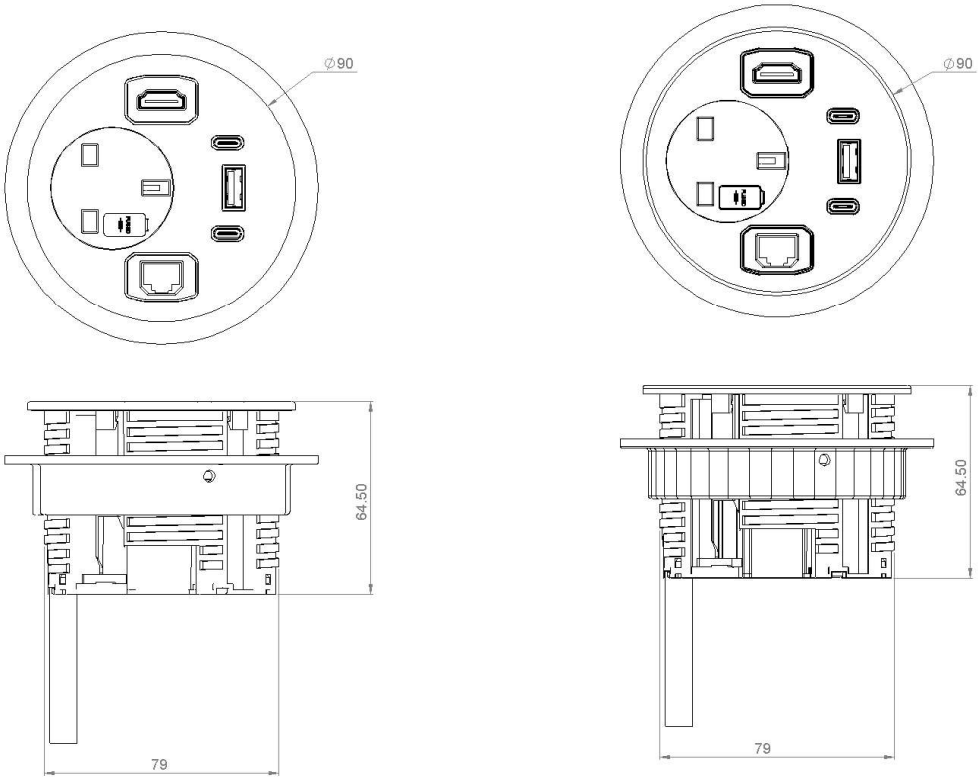

Cut Out Example

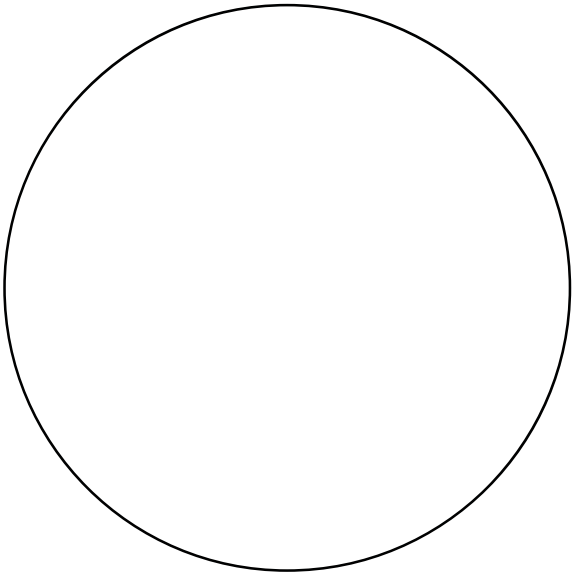

Holesaw Cutout -
Ø80mm (Tolerance -0/+2mm)

Disclaimer: CMS has made every attempt to ensure the accuracy and reliability of the information provided in this document are correct. All information contained in this document is to be used for general guidance only. CMS reserves the right to change, delete or modify the information without notice.
© CMS Electracom 2023